

Urban II.

W0022

Sit harness for work positioning

CE 0123

EN 358, EN 813




| | S | M/L | XL |
|-----------|---------------|----------------|----------------|
| X [cm/in] | 55-80 / 22-31 | 75-100 / 29-39 | 85-130 / 33-51 |
| Y [cm/in] | 45-60 / 18-24 | 50-75 / 20-29 | 50-75 / 20-29 |

Weight/hmotnost - 850g (size/velikost M/L)

Directive / směrnice
PSA 89/686/EEC
Nař. vlády 21/2003 Sb.

EC QMS of production inspected by /
ES SJ výroby prověřuje
TÜV Product Service GmbH
München, Germany

Certified by / certifikoval
VOP - 026 Šternberg, s.p. VTÚPV Vyškov, ČR








Reading and understanding instruction
for use are required to use this product!
Bez důkladného pročtení a pochopení návodu
k použití nepoužívejte tento výrobek



3 years guarantee
3 roky záruka

Technical description

- 1 - textile attachment point for work in hanging position, rappelling according to EN 813.
- 2 - positioning points according to EN 358 are placed symmetrically, tested for 15 kN strength.
- 3 - buckle with a captive bar matches strict American standards (ANSI, CSA). Its minimum strength is 17,2 kN. No webbing slippage in a buckle. Its construction ensures longtime operation and efficiency (easy releasing and fastening even when dirty and tough webbing). Corrosion resistance is tested by salt spray test 48 hours.
- 4 - braided gear loops with a bearing capacity of 10 kg provide enough space for 10 pieces of HMS carabiners.
- 5 - additional loops with a bearing capacity of 5 kg offer additional space for the gear and better gear orientation.
- 6 - slots designed for a secure hanging of expensive equipment (such as power saw, drilling machine,...)
- 7 - identification and methodical label. To prolong its lifetime is advised to hide this label under the webbing.
- 8 - 11 strength webbing, 8 - waist belt, 9 - front waist belt part, 10 - leg loops, 11 - connecting strap
- 12-13 anatomic waist (12) and leg padding (13) perfectly fits man anatomy
- 14 - elastic strap with an adjustable buckle connecting leg loops with a waist belt.
- 15 - back centric positioning point according to EN 358.

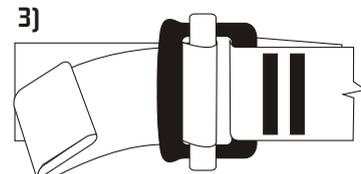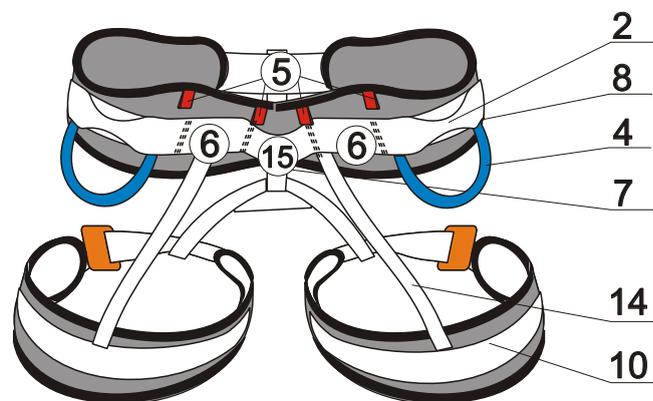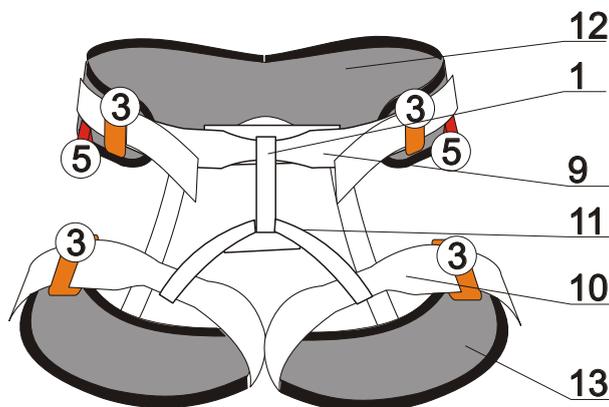

Singing rock

SAFETY FIRST

